

Eco Solvent Printer

Dual Head | Epson i3200 | 1.8m

The Dual Head Eco Solvent Printer by Mono Sign is designed for high-quality printing on a wide range of media including Vinyl, Flex, One-Way Vision, Backlit Film, and Canvas. Ideal for signage, branding, wallpapers, vehicle graphics, and advertising applications.



PRECISION**CORE**



Product Application



Vehicle Graphics



Flex Banner



One-Way Vision



Vinyl Printing



Backlit Signage



Wallpaper Printing



Canvas Printing



Photo Paper



Window Graphics



Retail Branding Displays




Outdoor Advertising



Exhibition & Event Graphics

Product Parameters

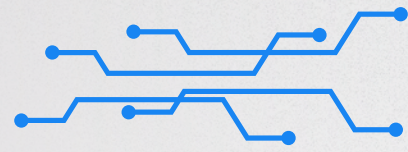

Model No.	ES-1800-E2-BU	
No. of Print Heads	2 x Epson i3200-E1	
Print Speed	4 Pass - 29 m ² /h	6 Pass - 19 m ² /h
Maximum Resolution	Up to 3200 DPI	
Max. Print Width	1800mm	
Ink	Eco Solvent Ink (CMYK)	
Printing Technology	Piezoelectric Inkjet	
Compatible Media	Vinyl, Flex, One-Way Vision, Canvas, Backlit Film	
Media Thickness	Up to 10 mm	
RIP Software	MainTop / PhotoPrint	
Print Head Nozzle Cleaning	Fully automatic cleaning, Fully automatic ink wiping, Fully automatic moisturizing	
Ink Supply System	Bulk Ink Supply System	
Ink Tank Capacity	1.5 L	
Features	Ink Low Alarm, Anti-Crash Sensor, Automatic Head Protection, Auto Take-Up System	
Control Board	BYHX	
Drying System	2000W IR Heaters with Cooling Fans	
Power Requirements	3500W, AC 220V+ _{-5%} , 50Hz~60Hz	
Working Environment	Temperature: (22°C to 28°C) Humidity: 35 to 80% (no condensation)	
Interface	USB 3.0 / LAN	
Printer Dimensions / Weight	3175 × 584 × 533 mm (L × W × H)	
Packing Dimensions	3962 × 1219 × 762 mm (L × W × H)	
Warranty	1 Year Warranty on Control Boards & Motors (Excluding Print Heads)	
Computer Configuration	Operating System	Windows 7, 8, 10
	Hardware Requirements	SSD above 256GB, 8GB Dual-Channel RAM (2400 MHz or above), Independent Video Memory above 2GB, Intel Core i5 processor or above
	Interface	USB 3.0 high-speed interface/ Gigabit Ethernet Cable